

Compliance Document for New Zealand Building Code Clause B2 Durability

Prepared by the Department of Building and Housing

This Compliance Document is prepared by the Department of Building and Housing. The Department of Building and Housing is a Government Department established under the State Sector Act 1988.

Enquiries about the content of this document should be directed to:



Department of Building and Housing
PO Box 10-729, Wellington.
Telephone 0800 242 243
Fax 04 494 0290
Email: info@dbh.govt.nz

Compliance Documents are available from www.dbh.govt.nz

New Zealand Government

© Department of Building and Housing 2010

This Compliance Document is protected by Crown copyright, unless indicated otherwise. The Department of Building and Housing administers the copyright in this document. You may use and reproduce this document for your personal use or for the purposes of your business provided you reproduce the document accurately and not in an inappropriate or misleading context. You may not distribute this document to others or reproduce it for sale or profit.

The Department of Building and Housing owns or has licences to use all images and trademarks in this document. You must not use or reproduce images and trademarks featured in this document for any purpose (except as part of an accurate reproduction of this document) unless you first obtain the written permission of the Department of Building and Housing.

Status of Compliance Documents

Compliance Documents are prepared by the Department of Building and Housing in accordance with section 22 of the Building Act 2004. A Compliance Document is for use in establishing compliance with the New Zealand Building Code.

A person who complies with a Compliance Document will be treated as having complied with the provisions of the Building Code to which the Compliance Document relates. However, a Compliance Document is only one method of complying with the Building Code. There may be alternative ways to comply.

Users should make themselves familiar with the preface to the New Zealand Building Code Handbook, which describes the status of Compliance Documents and explains alternative methods of achieving compliance.

Defined words (italicised in the text) and classified uses are explained in Clauses A1 and A2 of the Building Code and in the Definitions at the start of this Compliance Document.

| B2: Document History | | | |
|---|--|--|--|
| | Date | Alterations | |
| First published | July 1992 | | |
| Amendment 1 | September 1993 | p. 3, Table 1 | |
| Second Edition | 28 February 1998 | Document revised – second edition issued | |
| Amendment 2 | 1 December 2000 | p. ii, Document History p. v, Contents p. vi, References | p. 5, 3.2.2, 3.3, 3.4 p. 9, Index |
| Amendment 3 | 1 July 2001 | p. 2, Document History, Status p. 7, References | p. 8, 5.0.1 |
| Amendment 4 | 1 April 2004 | p. 2, Document History p. 7, References pp. 9–10, Definitions | p. 15, 3.2.1 Comment pp. 17–22 Table 1 p. 23 Index |
| Amendment 5* | 1 April 2004 | p. 7, References p. 9, Definitions | p. 15, 3.2.1, 3.2.2, 3.2.3 |
| Reprinted incorporating Amendments 3, 4 and 5 | April 2004 | | |
| Amendment 6 | Published 30 June 2010 Effective from 30 September 2010 | p. 2, Document History, Status p. 5, Contents p. 7, References | pp. 9–10, Definitions pp. 13–15, B2/AS1 1.1, 3.1.1, 3.2.1, 3.2.2 |
| Reprinted incorporating Amendment 6 | 30 September 2010 | | |
| Note: | *Amendment 5 regarding timber treatment is subject to a transitional provision. | | |
| Note: | Page numbers relate to the document at the time of Amendment and may not match page numbers in current document. | | |

Document Status

The most recent version of this document, as detailed in the Document History, is approved by the Chief Executive of the Department of Building and Housing. It is effective from 30 September 2010 and supersedes all previous versions of this document.

People using this Compliance Document should check for amendments on a regular basis. The Department of Building and Housing may amend any part of any Compliance Document at any time. Up-to-date versions of Compliance Documents are available from www.dbh.govt.nz

New Zealand Building Code

Clause B2 Durability

This Clause is extracted from the New Zealand Building Code contained in the First Schedule of the Building Regulations 1992 and amended by the Building Regulations 1997.

| FIRST SCHEDULE—continued | |
|---|---|
| Clause B2—DURABILITY | |
| Provisions | Limits on application |
| <p>OBJECTIVE B2.1 The objective of this provision is to ensure that a <i>building</i> will throughout its life continue to satisfy the other objectives of this code.</p> <p>FUNCTIONAL REQUIREMENT B2.2 <i>Building</i> materials, components and construction methods shall be sufficiently durable to ensure that the <i>building</i>, without reconstruction or major renovation, satisfies the other functional requirements of this code throughout the life of the <i>building</i>.</p> <p>PERFORMANCE B2.3.1 <i>Building elements</i> must, with only normal maintenance, continue to satisfy the performance requirements of this code for the lesser of the <i>specified intended life</i> of the <i>building</i>, if stated, or:</p> <p>(a) The life of the building, being not less than 50 years, if:</p> <p style="margin-left: 20px;">(i) Those <i>building elements</i> (including floors, walls, and fixings) provide structural stability to the building, or</p> <p style="margin-left: 20px;">(ii) Those <i>building elements</i> are difficult to access or replace, or</p> <p style="margin-left: 20px;">(iii) Failure of those <i>building elements</i> to comply with the <i>building code</i> would go undetected during both normal use and maintenance of the <i>building</i>.</p> <p>(b) 15 years if:</p> <p style="margin-left: 20px;">(i) Those <i>building elements</i> (including the <i>building</i> envelope, exposed plumbing in the subfloor space, and in-built chimneys and flues) are moderately difficult to access or replace, or</p> | <p>Performance B2.3.1 applies from the time of issue of the applicable <i>code compliance certificate</i>. <i>Building elements</i> are not required to satisfy a durability performance which exceeds the <i>specified intended life</i> of the <i>building</i>.</p> |

FIRST SCHEDULE—*continued*

| Provisions | Limits on application |
|---|-----------------------|
| <p>(ii) Failure of those <i>building elements</i> to comply with the <i>building code</i> would go undetected during normal use of the <i>building</i>, but would be easily detected during normal maintenance.</p> <p>(c) 5 years if:</p> <p>(i) The <i>building elements</i> (including services, linings, renewable protective coatings, and <i>fixtures</i>) are easy to access and replace, and</p> <p>(ii) Failure of those <i>building elements</i> to comply with the <i>building code</i> would be easily detected during normal use of the <i>building</i>.</p> | |
| <p>B2.3.2 Individual <i>building elements</i> which are components of a <i>building system</i> and are difficult to access or replace must either:</p> <p>(a) All have the same durability, or</p> <p>(b) Be installed in a manner that permits the replacement of <i>building elements</i> of lesser durability without removing <i>building elements</i> that have greater durability and are not specifically designed for removal and replacement.</p> | |

Contents

| | Page |
|---|-------------|
| References | 7 |
| Definitions | 9 |
| Verification Method B2/VM1 | 11 |
| 1.0 Durability Evaluation | 11 |
| 1.1 In-service history | 11 |
| 1.2 Laboratory testing | 11 |
| 1.3 Similar materials | 11 |
| Acceptable Solution B2/AS1 | 13 |
| 1.0 Durability Applications | 13 |
| 1.1 Compliance Documents | 13 |
| 1.2 Assessing required durability | 13 |
| 1.3 Examples of durability requirements | 14 |
| 2.0 Maintenance | 14 |
| 2.1 Normal maintenance | 14 |
| 2.2 Scheduled maintenance | 14 |
| 3.0 Generic Materials | 14 |
| 3.1 Concrete | 14 |
| 3.2 Timber | 15 |
| 3.3 Solid plastering | 15 |
| 3.4 Earth buildings | 15 |
| Index | 19 |

Amend 6
Sep 2010

Amend 2
Dec 2000

References

For the purposes of New Zealand Building Code compliance, the acceptable New Zealand and other Standards, and other documents referred to in this Compliance Document (primary reference documents) shall be the editions, along with their specific amendments, listed below. Where the primary reference documents refer to other Standards or other documents (secondary reference documents), which in turn may also refer to other Standards or other documents, and so on (lower order reference documents), then the applicable version of these secondary and lower order reference documents shall be the version in effect at the date this Compliance Document was published.

Amend 6
Sep 2010

Standards New Zealand

Where Quoted

| | | | | |
|---------------------|----------------------------|---|-----------|---------------------|
| Amend 6 Sep 2010 | NZS 3101:- Part 1: 2006 | Concrete structures standard The design of concrete structures <i>Amend: 1, 2</i> | AS1 3.1.1 | |
| Amend 5 Apr 2004 | NZS 3602:- Part 1: 1995 | Timber and wood-based products for use in building | AS1 3.2.2 | Amend 5 Apr 2004 |
| Amend 4 Apr 2004 | Part 1: 2003 | Timber and wood-based products for use in building | AS1 3.2.1 | |
| Amend 3 Jul 2001 | NZS 3604: 1999 | Timber framed buildings <i>Amend: 1</i> | AS1 3.2.3 | Amend 5 Apr 2004 |
| Amend 6 Sep 2010 | NZS 4251:- Part 1: 2007 | Solid plastering Cement plaster for walls, ceilings and soffits | AS1 3.3.1 | |
| | NZS 4297: 1998 | Engineering design for earth buildings | AS1 3.4.1 | |
| Amend 2 Dec 2000 | NZS 4299: 1998 | Earth buildings not requiring specific design <i>Amend: 1</i> | AS1 3.4.1 | |

Definitions

Amend 6
Sep 2010

This is an abbreviated list of definitions for words or terms particularly relevant to this Compliance Document. The definitions for any other italicised words may be found in the New Zealand Building Code Handbook.

Adequate *Adequate* to achieve the objectives of the *building code*.

Baluster A post providing the support for the top and bottom rails of a barrier.

Amend 4
Apr 2004

Balustrade The infill parts of a barrier (typically between floor and top rail).

Amend 6
Sep 2010

Building has the meaning given to it by sections 8 and 9 of the *Building Act 2004*.

Amend 4
Apr 2004

Building Code means the regulations made under section 400 of the *Building Act 2004*.

Building element Any structural and non-structural component or assembly incorporated into or associated with a *building*. Included are *fixtures*, *services*, *drains*, permanent mechanical installations for access, glazing, partitions, ceilings and temporary supports.

Amend 4
Apr 2004

Cladding The exterior weather-resistant surface of a *building*.

Amend 5
Apr 2004

Code compliance certificate means a certificate issued by a *building consent authority* under section 95 of the *Building Act 2004*.

Amend 6
Sep 2010

Damp-proof course (DPC) A narrow strip (generally up to 300 mm wide) of *durable vapour barrier* placed between *building elements* to prevent the passage of moisture from one element to another.

Damp-proof membrane (DPM) A sheet material, coating or vapour barrier, having a low water vapour transmission, and used to prevent water and water vapour movement through concrete in contact with the ground. (Also known as a concrete underlay.)

Amend 4
Apr 2004

Durable Resistant to wear and decay.

External wall Any exterior face of a *building* within 30° of vertical, consisting of *primary* and/or *secondary elements* intended to provide protection against the outdoor environment, but which may also contain *unprotected areas*.

Amend 4
Apr 2004

Fixture An article intended to remain permanently attached to and form part of a *building*.

Flue The passage through which the products of combustion are conveyed to the outside.

Handrail A rail to provide support to, or assist with the movement of a *person*.

Amend 4
Apr 2004

Hazardous Creating an unreasonable risk to people of bodily injury or deterioration of health.

Intended use in relation to a *building*,

(a) includes any or all of the following:

(i) any reasonably foreseeable occasional use that is not incompatible with the *intended use*;

(ii) normal maintenance:

(iii) activities undertaken in response to *fire* or any other reasonably foreseeable emergency; but

(b) does not include any other maintenance and repairs or rebuilding.

Amend 6
Sep 2010

Person includes the Crown, a corporation sole, and also a body of *persons*, whether corporate or unincorporated.

Primary element A *building element* providing the basic load bearing capacity to the structure, and which if affected by *fire* may initiate instability or premature structural collapse.

Secondary element A *building element* not providing load bearing capacity to the structure and if affected by *fire*, instability or collapse of the *building* structure will not occur.

Amend 4
Apr 2004

Amend 6
Sep 2010

Specified intended life has the meaning given to it by section 113(3) of the Building Act 2004.

Section 113(3) states:

“(3) In subsection (2), **specified intended life**, in relation to a building, means the period of time, as stated in an application for a building consent or in the consent itself, for which the building is proposed to be used for its intended use.”

Unprotected area in relation to an *external wall of a building*, means any part of the *external wall* which is not *fire* rated or has less than the required *FRR*.

COMMENT:

Unprotected area includes non-*fire* rated windows, doors, or other openings, and non-*fire* rated *external wall construction*.

Vapour barrier Sheet material or coating having a low water-vapour transmission, and used to minimise water-vapour penetration in *buildings*. (*Vapour barriers* are sometimes referred to as *damp-proof membranes*.)

Amend 4
Apr 2004

Water heater A device for heating water.

Verification Method B2/VM1

1.0 Durability Evaluation

1.0.1 Verification that the durability of a *building element* complies with the NZBC B2.3.1 and B2.3.2 will be by proof of performance and shall take into account the expected in-service exposure conditions by one or more of the following:

- a) In-service history,
- b) Laboratory testing,
- c) Comparable performance of similar *building elements*.

1.1 In-service history

1.1.1 Verification of durability based on in-service history of a *building element*, including materials, components and systems shall take into account but not be limited to:

- a) Length of service,
- b) Environment of use,
- c) Intensity of use,
- d) Any reaction with adjacent materials,
- e) Limitations in performance,
- f) Degree of degradation, and
- g) Changes in formulation.

1.2 Laboratory testing

1.2.1 Verification of durability based on successful performance in a laboratory test shall be accompanied by an assessment of the tests performed, their relevance to field and service conditions, and in particular:

- a) Types of degradation mechanisms likely to be induced by testing,
- b) The degradation mechanisms likely in service,
- c) Details of methods of assessment,
- d) Variability of results, and
- e) The relevance of the test to the *building element* under study.

1.3 Similar materials

1.3.1 For the purposes of evaluation, a *building element* may be considered as similar to another *building element* with proven performance, if both are subject to the same controls for composition and overall performance. Examples of such controls are Approved Documents or Standards. Where such a direct comparison is not possible, the *building element* shall be independently assessed to determine the degree of similarity.

1.3.2 Assessment shall take into account but not be limited to:

- a) Product composition,
- b) Method and quality assurance of manufacture,
- c) Degradation mechanisms,
- d) Local environment,
- e) Conditions of use,
- f) Required maintenance, and
- g) Performance in use.

COMMENT:

Environment

1. To be acceptable, any opinion in support of the assessed durability for a *building element* shall clearly identify the conditions of use and the environment under which that durability will be achieved. If the *building element* can be reasonably expected to be used in circumstances which will reduce the durability, any limitations in use shall be clearly identified and evaluated.
2. Circumstances which need to be considered include, but are not limited to:
 - a) Maintenance required to achieve the required durability (e.g. painting, cleaning, replacing high wear items such as washers),
 - b) Installation details of the total system (e.g. fixings, flashings, jointing materials),
 - c) Compatibility with other materials (e.g. galvanic corrosion, plasticiser migration),

DURABILITY

- d) Locality or macroclimatic effects (e.g. coastal or thermal areas, wet or damp ground conditions),
- e) Microclimatic effects (e.g. sheltered areas on *buildings* such as eaves),
- f) External environment influences (e.g. local industrial operations such as fertiliser works), and
- g) Internal environment (e.g. swimming pools, chemical processing areas, sauna rooms).

Acceptable Solution B2/AS1

1.0 Durability Applications

1.0.1 This acceptable solution applies to materials and components required to satisfy the performances specified in other NZBC clauses.

COMMENT:

All *building work* shall comply with the NZBC. This means that *building elements*, both individually and as part of a system, shall meet all the performances required by the applicable NZBC clauses and shall continue to do so for the required durability period. In some cases, *building elements* (e.g. decorative coatings and trim) are not required to satisfy an NZBC performance criterion. Such *building elements* will then have no B2 durability requirement. However, where a *building element* serves two purposes, only one of which must satisfy the NZBC, it shall have the durability appropriate to its location and use. For example, a decorative finish applied to a *building element* required by the NZBC to have an impervious easily cleaned surface will need to satisfy the 5 year durability performance.

1.1 Compliance documents

1.1.1 *Building elements*, including materials, components and systems, complying with a publication referenced in the Compliance Documents, satisfy B2 requirements only when the conditions of use stated in the publication and Compliance Documents prevail.

COMMENT:

It is not practicable within the Compliance Documents to cover all possible combinations, uses and conditions which may be applied to a *building element*. In special circumstances and where elements are called up but are used outside the scope of the Compliance Document application, durability shall be verified by B2/VM1.

Amend 6
Sep 2010

1.2 Assessing required durability

1.2.1 Evaluation of *building elements* shall be based on the following concepts:

- a) **Difficult to access or replace** – applies to *building elements* where access or replacement involves significant removal or alteration of other *building elements*. Examples are works involving the removal of masonry or concrete *construction*, or structural elements or repair of buried tanking membranes. A 50 year durability is required.

- b) **Moderately difficult to access or replace** – applies to *building elements* where access or replacement involves the removal or alteration of other *building elements*. Examples are the replacement of services reticulation in wall cavities and skillion roofs, or of plant and hotwater cylinders built into roof spaces without adequately sized access openings. A 15 year durability is required.
- c) **Easy to access and replace** – applies to *building elements* where access or replacement involves little alteration or removal of other *building elements*. Examples are linings, trim, light fittings, hotwater cylinder elements and door hardware, or where specific provision for removal has been made. A 5 year durability is required.
- d) **Failure to comply with the NZBC would go undetected during both normal use and maintenance of the building** – applies where the *building elements* are hidden from view with no provision for inspection access, and failure would not be apparent until significant damage had occurred to other *building elements*. Examples are building paper behind a masonry veneer cladding, and insulation in a skillion roof. A 50 year durability is required.
- e) **Failure to comply with the NZBC would go undetected during normal use of the building but would be easily detected during normal maintenance** – applies where normal maintenance will identify faults unlikely to be observed by *building occupants* until significant damage has occurred. Examples are degradation of exterior claddings on roofs and walls, sealant filled joints, flashings, services with specific provision for inspection access, chimneys and flues. A 15 year durability is required.

f) **Failure to comply with the NZBC would be easily detected during normal use of the building** – applies where the failure is obvious to the *building* occupants. Examples are exposed *building elements* which are damaged or inoperative such as protective finishes, essential signs, sticking doors, slip resistant surfaces, stair treads and surface-run *building services* equipment. A 5 year durability is required.

1.2.2 Figure 1 provides a means of assessing the durability requirements for *building elements*.

1.3 Examples of durability requirements

1.3.1 Table 1 is an acceptable solution establishing durability requirements of nominated *building elements*.

2.0 Maintenance

2.1 Normal maintenance

2.1.1 Normal maintenance is that work generally recognised as necessary to achieve the expected durability for a given *building element*. The extent and nature of that maintenance will depend on the material, or system, its geographical location and position within the *building*, and can involve the replacement of components subject to accelerated wear.

2.1.2 It is the responsibility of the person specifying the *building element* to determine normal maintenance requirements. These may be based on the manufacturer’s recommendations and may also include periodic inspections of elements not readily observable without a specific effort (e.g. access to roof or subfloor spaces).

2.1.3 Basic normal maintenance tasks shall include but not be limited to:

- a) Where applicable, following manufacturers’ maintenance recommendations,
- b) Washing down surfaces, particularly exterior *building elements* subject to wind driven salt spray,

- c) Re-coating interior and exterior protective finishes,
- d) Replacing sealant, seals and gaskets in joints,
- e) Replacing valves, washers and similar high wear components in easily accessed service equipment and other *building elements*,
- f) Cleaning and replacing filters in *building services* systems,
- g) The regular servicing of boilers, cooling towers, lifts, escalators, emergency lighting and *fire* protection equipment, and
- h) The maintenance of signs for access, *escape routes*, emergency equipment and *hazardous* areas.

COMMENT:
Maintenance does not include such things as upgrading *building elements* to meet the demands of new technology or the increased environmental expectations of users.

2.2 Scheduled maintenance

2.2.1 Scheduled maintenance comprises the inspection, maintenance and reporting procedures for *building elements* required to have a *compliance schedule* in terms of section 44 of the Building Act. By those procedures the *building elements* concerned are effectively deemed to have a durability of the life of the *building* because they are required to perform as designed at all times. The relevant maintenance procedures may include total replacement.

3.0 Generic Materials

3.1 Concrete

3.1.1 NZS 3101: Part 1 Section 3 is an acceptable solution for meeting the durability requirements of concrete building elements subject to the following modification:

Provisions in this Standard that are in non-specific or unquantified terms do not form part of the Acceptable Solution. Non-specific

Amend 6
Sep 2010

or unquantified terms include, but are not limited to, special studies, manufacturer's advice and references to methods that are appropriate, adequate, suitable, relevant, satisfactory, acceptable, applicable, or the like. Such provisions must be treated as the basis of an alternative solution proposal.

Amend 6
Sep 2010

3.2 Timber

Amend 5
Apr 2004

3.2.1 Part 1 of NZS 3602: 2003 is an acceptable solution for meeting the durability requirements of timber *building elements*.

COMMENT:

The use of different timbers or timber treatments to those referred to in NZS 3602 may still comply with the *building code* in particular applications. Where the use of a different timber or timber treatment is proposed, this would be an alternative solution and evidence must be provided to the *building consent authority* that the intended use will meet the *building code*. For example, if imported hard-wood is to be used to surface a deck, evidence that the timber was durable for a minimum of 15 years in the expected exposure conditions is required.

Amend 6
Sep 2010

Amend 4
Apr 2004

3.2.2 From 1 April 2004 to 31 March 2005 nothing in Paragraph 3.2.1 shall apply to the issue of *code compliance certificates*, but the previous acceptable solution Part 1 of NZS 3602: 1995 will continue to apply as an acceptable solution until 31 March 2005.

Amend 6
Sep 2010

Amend 5
Apr 2004

3.2.3 NZS 3604 is an acceptable solution for meeting the durability requirements of *buildings* within its scope, except that any reference to NZS 3602 shall be read as having been amended in accordance with Paragraphs 3.2.1 and 3.2.2 above.

Amend 5
Apr 2004

3.3 Solid plastering

3.3.1 NZS 4251: Part 1 is an acceptable solution for meeting the durability requirements of cement plasters for walls, ceilings and soffits within its scope.

3.4 Earth buildings

3.4.1 NZS 4297 and NZS 4299 are acceptable solutions for meeting the durability requirements of earth *buildings* within their scope.

Amend 2
Dec 2000

Figure 1: Assessment of Durability Requirement
Paragraph 1.2.2

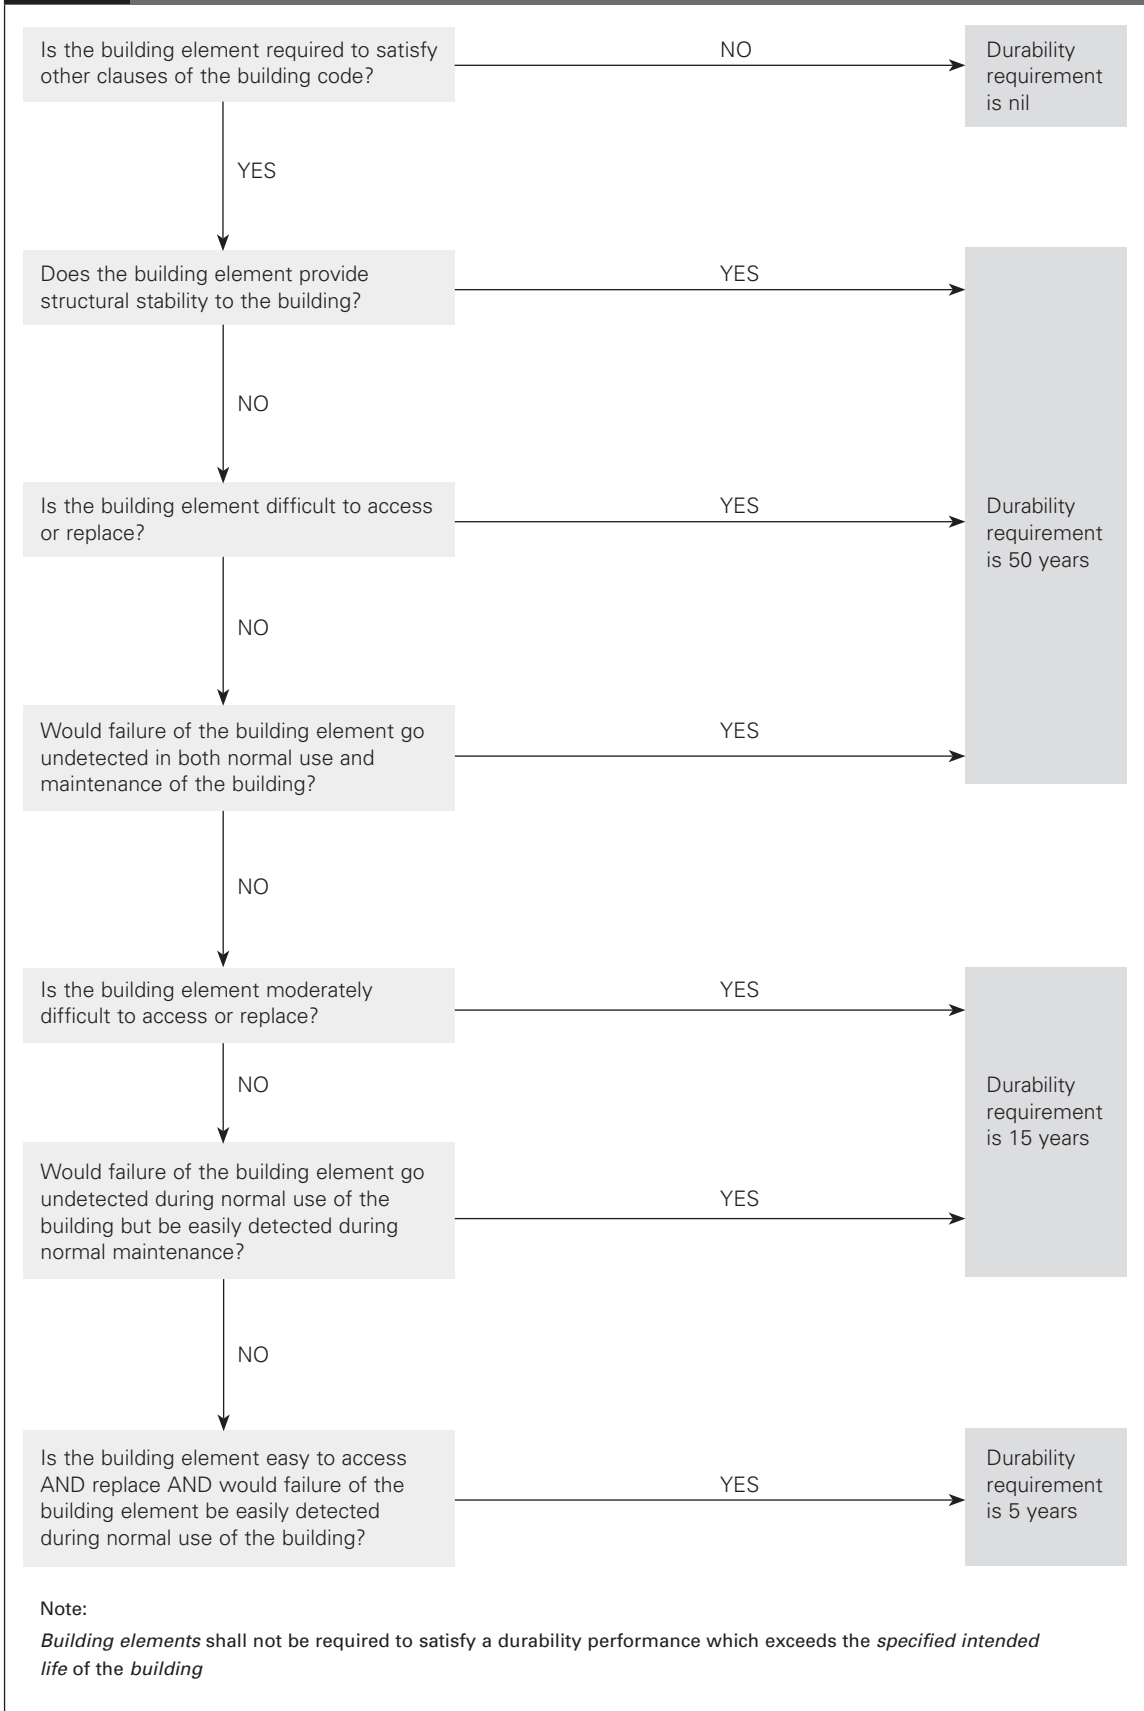


Table 1: Durability Requirements of Nominated Building Elements

Note: Clause B2.3.2 requires that all hidden elements have at least the same durability as that of the element that covers it (i.e. must have the same expected life) which may be more than the requirement in clause B2.3.1. For example, the reason that a brick tie has a requirement of not less than 50 years in this table, instead of the 15 year requirement for *cladding*, is that the brick veneer that hides it has an expected durability of 50 years or more.

| Building Element | Component | Situation/Function | Not less than 50 years | Not less than 15 years | Not less than 5 years |
|---|---|--|------------------------|------------------------|-----------------------|
| Acoustic elements | | Covered by or integral with structural elements or bracing panels | ✓ | | |
| | | Behind non-structural <i>claddings</i> or linings | ✓ | | |
| | | Surface mounted | | ✓ | |
| Balustrade | (Refer to safety barrier) | | | | |
| Battens (Cavity battens for wall <i>cladding</i> systems) (See note at top of table) | Battens | Where wall <i>cladding</i> durability requirement is 15 years | | ✓ | |
| | | Where wall <i>cladding</i> provides bracing | ✓ | | |
| Bracing Elements | | All – includes the bracing element and fixings | ✓ | | |
| Building wraps (See also wind barriers) (See note at top of table) | Roof underlay | Access requires removal of roof tiles or structural elements | ✓ | | |
| | | Where roof <i>cladding</i> durability requirement is 15 years | | ✓ | |
| | Wall underlay | Where wall <i>cladding</i> durability requirement is not less than 50 years (e.g. providing bracing, or where the <i>cladding</i> is very durable e.g. brick veneer) | ✓ | | |
| | | Where wall <i>cladding</i> durability requirement is 15 years | | ✓ | |
| Wind barriers | Providing bracing (i.e. rigid wind barriers) | ✓ | | | |
| | Not providing bracing (non-rigid wind barriers) | | ✓ | | |
| Cladding (including jointing systems) | Roof | Structural | ✓ | | |
| | | Non-structural | | ✓ | |
| | Wall | Structural including bracing elements | ✓ | | |
| Non-structural | | | ✓ | | |
| Curtain walling | Frames and fixings | All <i>buildings</i> | ✓ | | |
| | Gaskets, glazing or panelling and beads | | | ✓ | |
| | Internal hardware | | | | ✓ |
| Damp-proof course (DPC) | DPCs under timber members | Under structural framing | ✓ | | |
| | | Under non-structural framing | | ✓ | |
| Damp-proof membranes (DPM) (See note at top of table) | Damp-proofing generally | DPMs under concrete floor slabs | ✓ | | |

Amend 4
Apr 2004

Table 1: Durability Requirements of Nominated Building Elements (cont'd)

| Building Element | Component | Situation/Function | Not less than 50 years | Not less than 15 years | Not less than 5 years |
|--|---|---|---|------------------------|-----------------------|
| Damp-proof membranes (DPM) (Continued) | Damp-proofing generally | DPMs applied to the top of concrete slabs | | ✓ | |
| | | DPMs behind retaining walls used for landscaping | | ✓ | |
| | | DPMs designed for ready access and replacement | | ✓ | |
| | | DPM behind tiles | Same durability as the tile covering it | | |
| | Water-proofing of basements | Tanking, except those designed for ready access | ✓ | | |
| | | Tanking designed for ready access | | ✓ | |
| Decking (timber) | Decking | Structural (e.g. bracing diaphragm) | ✓ | | |
| | | Non-structural strip decking | | ✓ | |
| | Sub-floor structure | All | ✓ | | |
| Demountable Partitions | Partition including frame, fixings, and linings | All | | | ✓ |
| Doors (including frame) | Non fire rated doors | Internal | | | ✓ |
| | | External | | ✓ | |
| | | Furniture and hardware | | | ✓ |
| | Fire rated doors | Internal | | ✓ | |
| | | External | | ✓ | |
| | | Furniture and hardware | | | ✓ |
| Electrical work (See note at top of table) | Wiring | Buried in or under concrete slabs or behind structural linings without ducts | ✓ | | |
| | | Concealed behind linings or in complex ducts or conduit, or surface mounted in conduit | | ✓ | |
| | | Wires in easy to access ducts | | | ✓ |
| | Fittings | Concealed and moderately difficult to access or replace | ✓ | | |
| | | Surface mounted | | | ✓ |
| | Ducting or conduit | Difficult to access or replace | ✓ | | |
| | | Moderately difficult to access or replace | | ✓ | |
| Fire rated walls | | Structural walls including bracing elements | ✓ | | |
| | | All others | | ✓ | |
| Fixings | Nails and screws | Used to fix structural or difficult to replace <i>building elements</i> | ✓ | | |
| | | Under water-proof membranes | ✓ | | |
| | | Under roofing membranes | ✓ | | |
| | | Used to fix non-structural or moderately difficult to replace <i>building elements</i> | | ✓ | |
| | Bolts | Used to fix structural or difficult to access or replace <i>building elements</i> including structural elements of decks and barriers | ✓ | | |

Table 1: Durability Requirements of Nominated Building Elements (cont'd)

| Building Element | Component | Situation/Function | Not less than 50 years | Not less than 15 years | Not less than 5 years |
|--|---|--|------------------------|------------------------|-----------------------|
| Fixings (Continued) | Bolts | Used to fix non-structural or moderately difficult to replace <i>building elements</i> | | ✓ | |
| | Brick ties and fixings | All | ✓ | | |
| | Proprietary fixings | Used to fix structural or difficult to replace <i>building elements</i> | ✓ | | |
| | | Used to fix non-structural or moderately difficult to replace <i>building elements</i> | | ✓ | |
| | Adhesives | Used to fix structural or difficult to replace <i>building elements</i> | ✓ | | |
| | | Used to fix non-structural or moderately difficult to replace <i>building elements</i> | | | ✓ |
| Face fixings | Used to fix accessories, door furniture and hardware | | | ✓ | |
| Flashings (See note at top of table) | Roof, wall or window | All flashings to roof <i>cladding</i> , <i>flues</i> and other roof penetrations | | ✓ | |
| | | Requires the removal of <i>cladding</i> above the roof to be replaced | ✓ | | |
| | | Hidden flashings such as behind brick veneer, stucco or spandrel panels | ✓ | | |
| | | Visible and does not require the removal of the <i>cladding</i> to be replaced | | ✓ | |
| | | Requires the removal of the <i>cladding</i> to be replaced | ✓ | | |
| Flooring – sheet or strip (See note at top of table) | | Floor bracing diaphragm | ✓ | | |
| | | Flooring laid under bottom plates | ✓ | | |
| | | Flooring laid between bottom plates | | ✓ | |
| Floor coverings | | Protective or acoustic coverings | | | ✓ |
| Flue systems | All <i>flue</i> systems | Those built into the floor, wall, ceiling or roof | | ✓ | |
| | | Those exposed to view or penetrating the floor, wall, ceiling or roof through a sleeve | | | ✓ |
| Framing | (refer to wall framing or to roof framing as appropriate) | | | | |
| Guttering and downpipes (See note at top of table) | | Gutters or downpipes incorporated within the structure (e.g. downpipes cast into a column or boxed in behind <i>claddings</i>), or secret gutters (e.g. hidden verge or valley gutters) | ✓ | | |
| | | Internal or valley gutters, fascia gutters or built-in downpipes | | ✓ | |
| | | External gutters and downpipes | | | ✓ |
| | | | | | ✓ |
| Heating Appliances | Solid fuel | Freestanding | | | ✓ |
| | | Inbuilt | | ✓ | |
| | Gas | Freestanding | | | ✓ |
| | | Inbuilt | | ✓ | |
| | Electric | Permanently wired | | | ✓ |

Amend 4
Apr 2004

Table 1: Durability Requirements of Nominated Building Elements (cont'd)

| Building Element | Component | Situation/Function | Not less than 50 years | Not less than 15 years | Not less than 5 years |
|--|----------------------------|--|--|-------------------------------------|-----------------------|
| Insulation | Sub-floor | | ✓ | | |
| | Walls | | ✓ | | |
| | Ceiling or roof | Skillion roof | ✓ | | |
| | | Accessible ceiling or roof space | ✓ | | |
| Interior wall linings | | Structural linings (e.g. bracing elements) | ✓ | | |
| | | Shower linings (excluding behind tiled showers) | | ✓ | |
| | | Linings behind tiled showers | | Same durability as tile covering it | |
| | | Easy to access and replace | | | ✓ |
| Lintels | Steel angle (brick veneer) | All situations | ✓ | | |
| | Flat steel | All situations | ✓ | | |
| Plumbing and piping | Piping and fittings | Cast into concrete | ✓ | | |
| | | Under slabs | ✓ | | |
| | | Installed in a masonry cavity and not ducted or provided with maintenance access | ✓ | | |
| | | Concealed behind wall linings or installed in maintenance ducting | | ✓ | |
| | | Surface mounted and easy to replace | | | ✓ |
| | | Valves | Concealed or moderately difficult to replace | | ✓ |
| | | Surface mounted and easy to replace | | | ✓ |
| | | <i>Fixtures</i> | | | ✓ |
| | Outlets | | | ✓ | |
| Protective Coatings | | Paint systems that are difficult to access or replace | ✓ | | |
| | | Roofing membranes | | ✓ | |
| | | Paint systems that are easy to access and replace | | | ✓ |
| Roof framing including trusses, purlins, tile battens and bracing members | | | ✓ | | |
| Roofing tile battens | | | ✓ | | |
| Safety barrier (balustrade, baluster, and handrail) | Support posts, handrails | | ✓ | | |
| | <i>Balusters</i> | | | ✓ | |
| Septic tanks | | Built into or under the structure of a building | ✓ | | |
| | | Easy to access units (e.g. in-ground but accessible) | | ✓ | |
| | | Effluent field | | ✓ | |

Amend 4
Apr 2004

Table 1: Durability Requirements of Nominated Building Elements (cont'd)

| Building Element | Component | Situation/Function | Not less than 50 years | Not less than 15 years | Not less than 5 years |
|--|--------------------------------------|--|--|------------------------|-----------------------|
| Stairs and ladders (for <i>balustrades</i> refer to safety barriers) | Stringers | | ✓ | | |
| | Treads | Difficult to replace | ✓ | | |
| | | Moderately difficult to replace | | | ✓ |
| | Ladders including rungs | | | ✓ | |
| Tiling | Walls and floors (including showers) | Tiling in wet areas | | ✓ | |
| | Walls and floors | Decorative finish only | No durability requirement under the <i>building code</i> | | |
| Under-floor heating | Heating coils | Buried in concrete slabs | ✓ | | |
| | | Accessible coils | | ✓ | |
| | Cables and fittings | Buried in concrete slabs | ✓ | | |
| | | Accessible cables and fittings | | ✓ | |
| Vapour barriers | | Behind structural elements or difficult to access and replace | ✓ | | |
| | | Behind non-structural internal linings | | ✓ | |
| | | High gloss paint finish | | | ✓ |
| Ventilation | Plant | All | | ✓ | |
| | Ducting | Built-in ducting | | ✓ | |
| | | Easy to access and replace | | | ✓ |
| | Fittings | | | | ✓ |
| Vermin proofing | | Built into structure | ✓ | | |
| | | Moderately difficult to access or replace | | ✓ | |
| | | To drained ventilated cavity | Same durability as the <i>cladding</i> covering it | | |
| Water heaters | Continuous flow heaters | Moderately difficult to access or replace (e.g. installed in cupboard) | | ✓ | |
| | | Easy to access or replace (e.g. on internal or <i>external wall</i>) | | | ✓ |
| | <i>Storage water heaters</i> | Moderately difficult to access or replace (e.g. installed in cupboard) | | ✓ | |
| | | Easy to access but moderately difficult to replace | | ✓ | |
| Wall framing including dwangs or nogging | Timber or steel | Load-bearing framing | ✓ | | |
| | | Easy to access lined, non-load-bearing partitions | | ✓ | |
| | | Easy to access unlined, non-structural partitions or non-load-bearing demountable partitions | | | ✓ |
| | Structural Steel | All | ✓ | | |
| Windows | Frame and interior reveals | Structural units | ✓ | | |
| | | External window/door joinery | | ✓ | |
| | | Internal window joinery | | | ✓ |

Amend 4
Apr 2004

Table 1: Durability Requirements of Nominated Building Elements (cont'd)

| Building Element | Component | Situation/Function | Not less than 50 years | Not less than 15 years | Not less than 5 years |
|-------------------------------|------------------------------------|---|------------------------|------------------------|-----------------------|
| Windows (Continued) | Gaskets, glazing and glazing beads | Moderately difficult to access or replace | | ✓ | |
| | Hardware | | | | ✓ |

Amend 4
 Apr 2004

Index B2/VM1 & AS1

All references to Verification Methods and Acceptable Solutions are preceded by **VM** or **AS** respectively.

| | | |
|---------------------|---|--|
| | Concrete | AS1 3.1.1 |
| | Durability evaluation | VM1 1.0, AS1 1.2, Figure 1 |
| Amend 4 Apr 2004 | examples of requirement | AS1 1.3.1, Table 1 |
| | generic materials | AS1 3.0 |
| | in-service history | VM1 1.1 |
| | laboratory testing | VM1 1.2 |
| | similar materials | VM1 1.3 |
| Amend 2 Dec 2000 | Earth buildings | AS1 3.4 |
| | Ease of access and replacement | AS1 1.2.1 |
| | Maintenance | AS1 2.0 |
| | normal | AS1 2.1 |
| | scheduled | AS1 2.2 |
| Amend 2 Dec 2000 | Solid plastering | AS1 3.3 |
| | Timber | AS1 3.2 |

